
CP6923

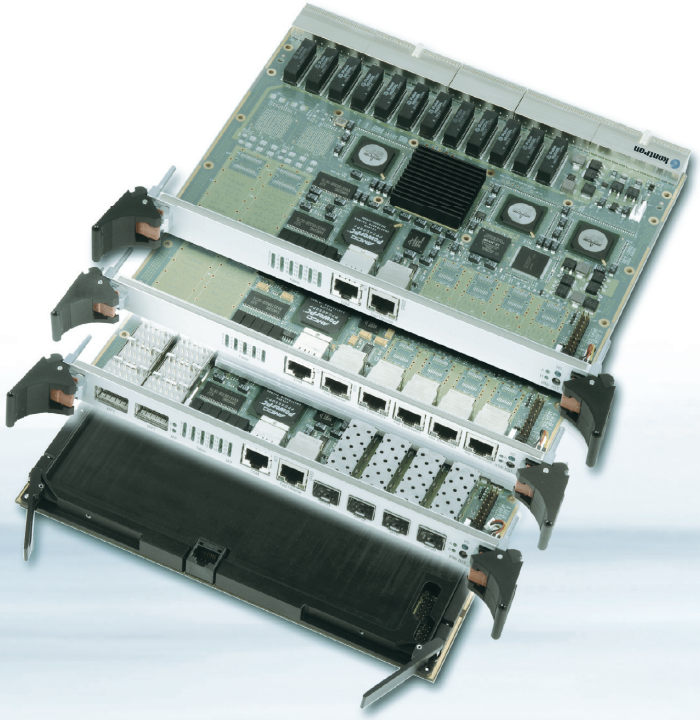

24 PORT NON-BLOCKING LAYER 2 & 3
PICMG 2.16 MANAGED GIGABIT ETHERNET SWITCH

- State-of-the-art technology, future ready
- Non-blocking layer 2 and 3 switching and routing
- 24 Gigabit Ethernet ports plus two 10 GbE XFP uplinks
- Versatile design, adapted to your requirements
- Ruggedized for harsh environment

POSSIBILITIES START HERE kontron

CP6923

24 PORT NON-BLOCKING LAYER 2 & 3 PICMG 2.16 MANAGED GIGABIT ETHERNET SWITCH


The Kontron CP6923 provides managed built-in switching capacity for CompactPCI installations at an unsurpassed price-performance ratio by implementing the latest developments in switching technology.

It applies to VoIP systems such as Call Servers, Media Gateways and Trunking Gateways in wired and wireless networks, as well as VoIP systems in enterprise networks with high demands on performance. A boost in switching capacity allows to match rising transaction load and traffi c load in VoIP installations.

The CP6923 is a 6U hot-swappable CPCI switch with 24 GbE ports and two high capacity uplinks (10 GbE). It supports all relevant standards in carrier grade L2 and L3 switching and routing, including VLANs and QoS (Diffser). It represents the latest member of the CPCI product family for communication networks by Kontron and comes in three standard flavors, all with 20 or more Gigabit Ethernet ports to the rear and a serial and LAN console connection to the front panel.

The rugged versions CP6923-R-R2-E2 and CP6923-R-R3-E2 fulfill the temperature, shock and vibration requirements for harsh environment. Both operate from -40 °C to +85 °C.

The forced air cooled R2 board withstands shock & vibration according to the VITA 47's EAC3 specification. The conduction cooled R3 switch fulfills the VITA 47's ECC4 specifi cations.

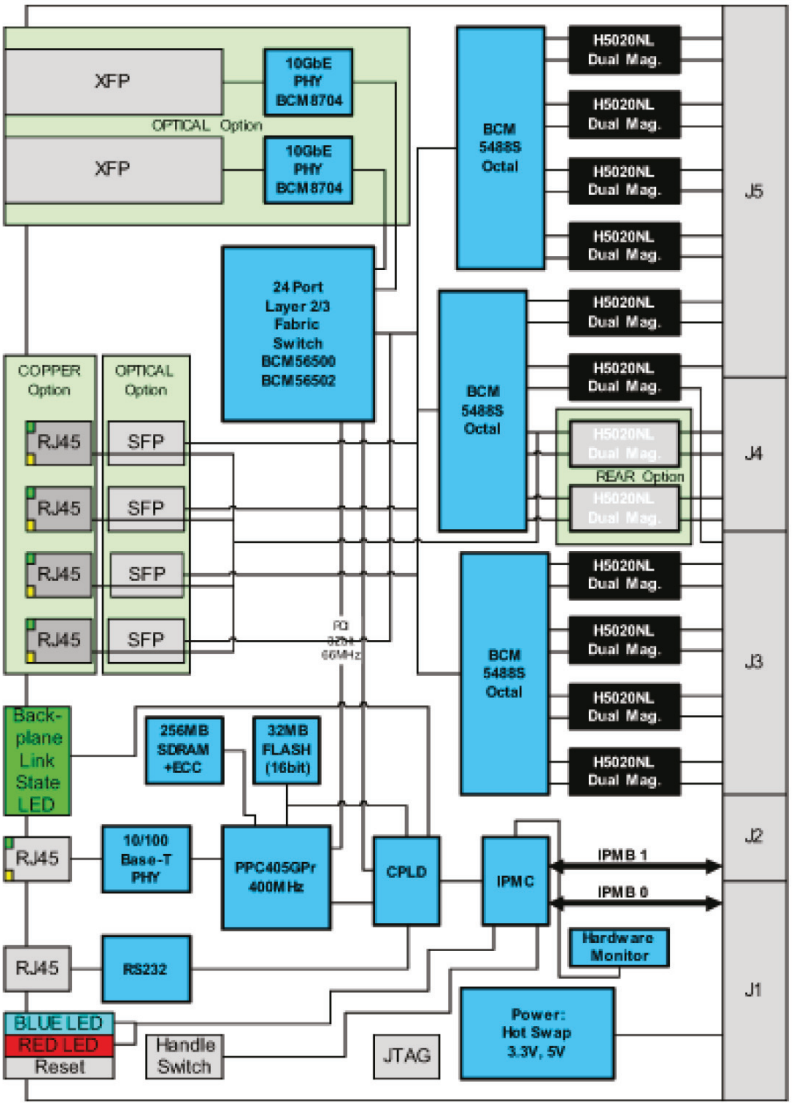


TECHNICAL INFORMATION

COMPLIANCY		CompactPCI Core Specification PICMG 2.0 Rev. 3.0 CompactPCI Hot Swap Specification PICMG 2.1 R2.0 CompactPCI System Management PICMG 2.9 R1.0 CompactPCI Packet Switching Backplane PICMG 2.16 R1.0 VNE64x Packet Switching Backplane VITA 31.1
CONTROLLER AND SWITCH		Broadcom BCM5650x Ethernet switch PowerPC® 405, 32-bit, RISC processor core operating up to 400 MHz, synchronous SDRAM interface
INTERFACES ON STANDARD BOARDS	COMMON CP6923-C CP6923-O CP6923-R	1x 10/100Base-T management port on RJ45 1x RS232 management port on RJ45 20x 10/100/1000 Base-T link ports on RTM Reset switch Status LEDs, one per port 4x 10/100/1000Base-T link ports on RJ45 4x 10/100/1000Base-X link ports on SFP 2x 10GBase-R uplink ports on XFP 4x additional 10/100/1000Base-T RTM ports
INTERFACES ON RUGGED VERSIONS	CP6923-R-R2 CP6923-R-R3	1x 10/100Base-T management port on RJ45 1x RS232 management port on RJ45 Reset switch Status LEDs, one per port 24x 10/100/1000Base-T link ports on RTM 1x Ethernet management port on RJ45 24x 10/100/1000Base-T link ports on RTM
MANAGEMENT AND PROTOCOLS		Management via SNMP, Telnet, CLI - In-band - Out of band via Ethernet or RS232 IPMI version 1.5 Reliable software, fi eld upgradable Dual boot images with roll-back capabilities Advanced management monitoring features Ethernet/Bridging protocols include - Link aggration (802.3ad) - VLANs (802.1Q) - Spanning tree (802.1D, 802.1w) - Flow control (802.3x) - GVRP, GMRP Comprehensive Multicast and IGMP snooping feature set Enhanced Link aggregation hashing features Packet memory confi guration options
GENERAL	POWER CONS. DIMENSIONS OP. HUMIDITY WEIGHT MTBF CP6923 CP6923-R-R2 CP6923-R-R3	35 Watts (typ.) 215 mm x 160, 6U 0 % to 92 % (non-condensing) < 800 g 198,216 h @ 30 °C / 86 F (Bellcore Issue 6) IEC 60068-2-6, IEC 60068-2-27, IEC 61131-2 0 °C to +55 °C, forced air cooling required R1 + VITA 47, class V1/EAC3, normal and extended -40 °C to +85 °C, forced air cooling required VITA 47, class ECC4, MIL-STD-810 Method 514 Proc1, MIL-STD-810 Method 516 Proc1, extended -40 °C to +85 °C, conduction cooling required Higher shock and vibration levels can be achieved when installed in a ruggedized system.

ORDERING INFORMATION

ARTICLE	DESCRIPTION
LAYER 2/3 MANAGEMENT, NON BLOCKING	
CP6923-C	R1 copper version with 20, Gigabit Ethernet ports to the rear and four RJ45 ports to the front panel
CP6923-O	R1 optical version with 20, Gigabit Ethernet ports to the rear; four SFP cage connectors and two 10 Gb XFP cage connectors to the front panel
CP6923-R	R1 rear version with 24, Gigabit Ethernet ports to the rear
CP6923-R-R2-E2	R2 rear version with 24, Gigabit Ethernet ports to the rear
CP6923-R-R3-E2	R3 rear version with 24, Gigabit Ethernet ports to the rear
LAYER 2 MANAGEMENT, NON BLOCKING	
CP6923-C-V	R1 copper version with 20, Gigabit Ethernet ports to the rear and four RJ45 ports to the front panel; L2 management only
REAR TRANSITION MODULES	
CP-RIO6-923	6U, 4HP, rear transition module for PICMG 2.16 switch, 12 ports (ports 12 to 23), RJ45, RS232 on RJ45
CP-RIO6-923	6U, 8HP, rear transition module for PICMG 2.16 switch, 24 ports (ports 1 to 24), RJ45, RS232 on RJ45

Other Modules and Conformal Coating on request

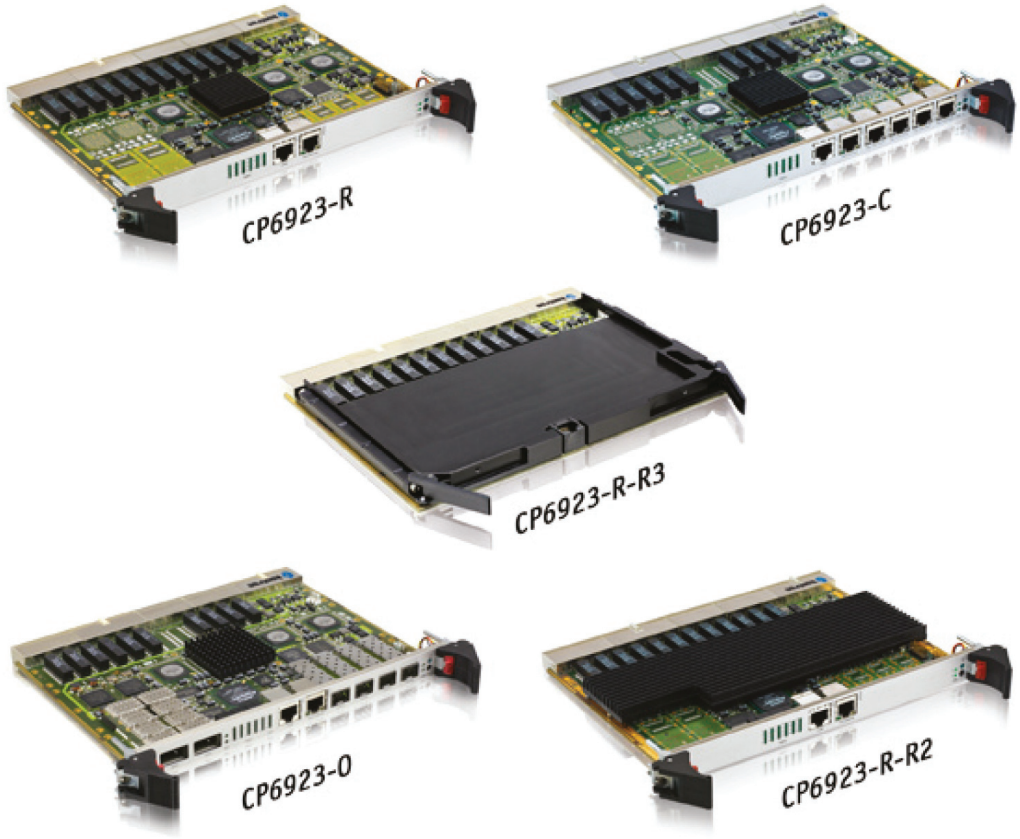

CORPORATE OFFICES

EUROPE, MIDDLE EAST & AFRICA

Lise-Meitner-Str. 3-5
86156 Augsburg
Germany
Tel.: + 49 821 4086 0
Fax: + 49 821 4086 111
info@kontron.com

NORTH AMERICA

9477 Waples Street
San Diego, CA 92121
USA
Tel.: + 1 888 294 4558
Fax: + 1 858 677 0898
info@us.kontron.com

ASIA PACIFIC

1~2F, 10 Building, No. 8 Liangshuihe 2nd Street,
Economical & Technological Development Zone,
Beijing, 100176, P.R.China
Tel.: +86 10 63751188
Fax: +86 10 83682438
info@kontron.cn

Copyright © 2015 Kontron AG. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Kontron and the Kontron logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized. Specifications are subject to change without notice. ICPs-20151207-WMH