
JFLEX-DUALDVI-PM

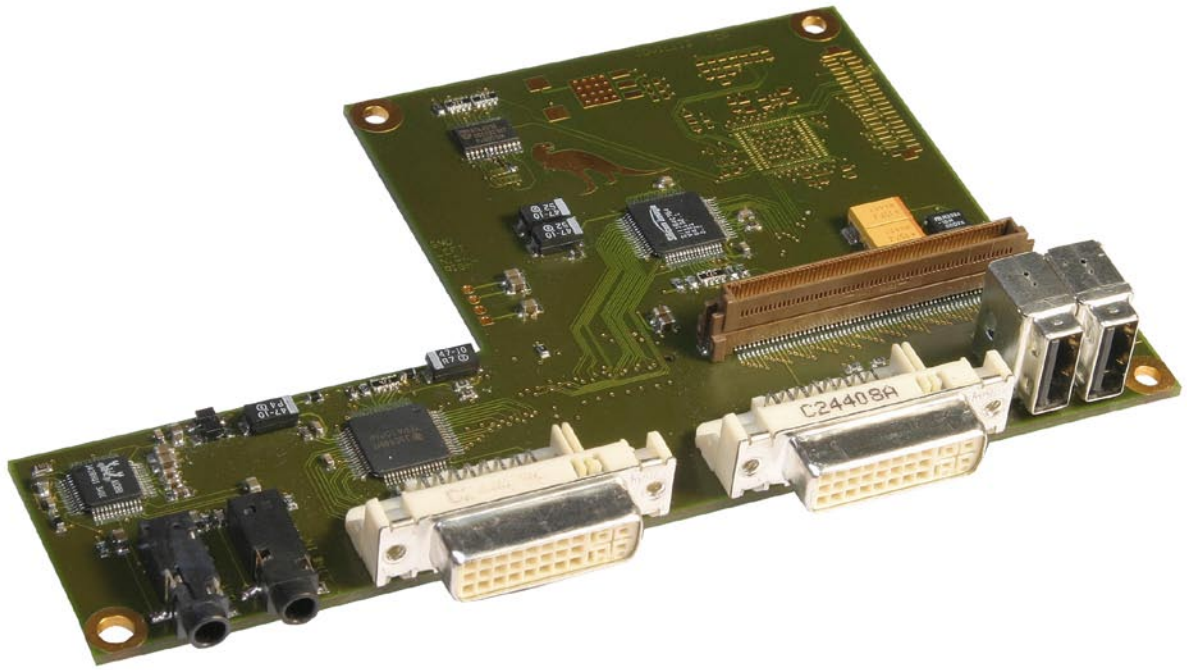

Intel® Communications Alliance Premier Member GOLD

powered by Intel® Pentium® M

- Enables Multimedia DUAL Independent screen with sound the easiest way
- Made for JRex-PM with Pentium® M and DUAL GRAPHICS Engine
- DUAL DVI (digital)
- 2x USB 2.0
- Sound (Line-in, Line-out jack-plugs)
- NO moving parts, firmly lockeable

kontron

Product Overview

The **JFLEX-DUALDVI-PM** enhances JRex-PM (3.5" SBC with Pentium M) with **DUAL DVI, 2x USB 2.0** and **Sound**. And that is done cable free, simply by stacking the JFLEX on top of the JRex-PM from the embedded line.
Every JRex 3.5" SBC features the interface to mount a JFLEX™. JFLEX™ is an add-on I/O extension module that can be firmly screwed on top of every JRex without harming the JRex foot-print of the 3.5" size.

The I/O functionality comes cable free with up to PCI performance at a fraction of the average price of comparable add-on solutions. By keeping it most cable free, low cost is maintained and manual errors are minimized. Stacked on top, the JFLEX concept opens the way for immediately available, low cost and even customizable I/O extensions.
With JRex you stay

...always a JUMP ahead!

Technical Information

JFLEX-DUALDVI-PM features
2x DVI-D socket
2x USB 2.0
1x Line-In jack-plug
1x Line-Out jack-plug
JFLEX-DUALDVI-PM features
stackthrough for further JFLEX expansions


Dimensions
140,2 x 79,4 mm
Temperature
operation: 0° to 60°C, storage: -10° to 85°C
Humidity
operation: 10% to 90%, storage: 5% to 95% (non condensing)

(*) see manual for details

Ordering Information

Article	Part.-No.	Description
JFLEX-DUALDVI-PM	02060-0000-00-2	with: 2x DVI output, 2x USB 2.0 and Sound (Line-In, Line-Out) for JRex-PM

Article	Part.-No.	Description
JRex-PM	02004-0000-10-2	Intel® ULV Celeron® M processor 373, 1.0 GHz (DOTHAN Core), ATX, 512 KB L2
	common features:	Intel® 855GME chipset, VGA/LCD on-chip, 10/100Base-T, 2xCOM, 2x USB 2.0, LPT, IDE.JFLEX extention. DDR-RAM-DIMM-socket, Compact-Flash™ socket. CRT and JILI-Panel-Interface

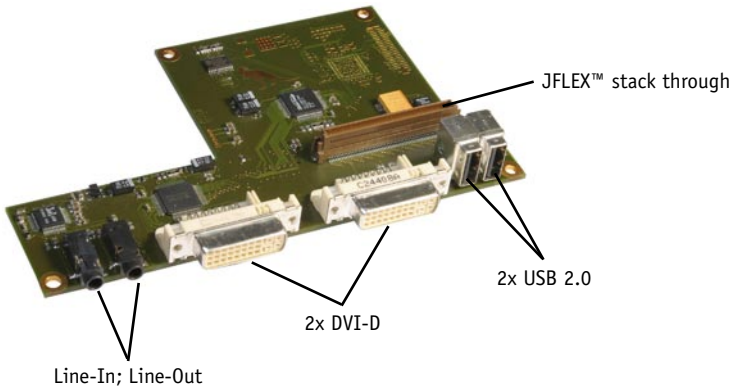

Corporate Offices

Europe, Middle East & Africa
Kontron AG
Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany
Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 219
sales@kontron-emea.com

North America
Kontron America Corporate Office
14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: +1 888 294 4558
Fax: +1 858 677 0898
sales@us.kontron.com

Asia Pacific
Kontron Asia Inc.
4F, No. 415, Ti-Ding Blvd.
Sec.2, NeiHu District
Taipei Taiwan 114
Tel.: +886-2-2799-2789
Fax: +886-2-2799-7399
sales@kontron.com.tw

Kontron Embedded Modules
Brunnwiesenstr. 16
94469 Deggendorf
Germany

Tel.: +49 (0)991/ 370 24-100
Fax: +49 (0)991/ 370 24-333
sales-kem@kontron.com

#JFLEX-DUALDVI-PM#23032006PDL
All data is for information purposes only and not guaranteed for legal purposes. Subject to change without notice. Information in this datasheet has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. All brand or product names are trademarks or registered trademarks of their respective owners. DIMM-PC® and JUMPtec® are registered trademarks of Kontron Embedded Modules GmbH, Germany. Rev #ETXexpress-PM#300305
RoHS compliant logo means that product will be lead-free/RoHS compliant latest by June 30th, 2006.