
Micro Client

M@C57

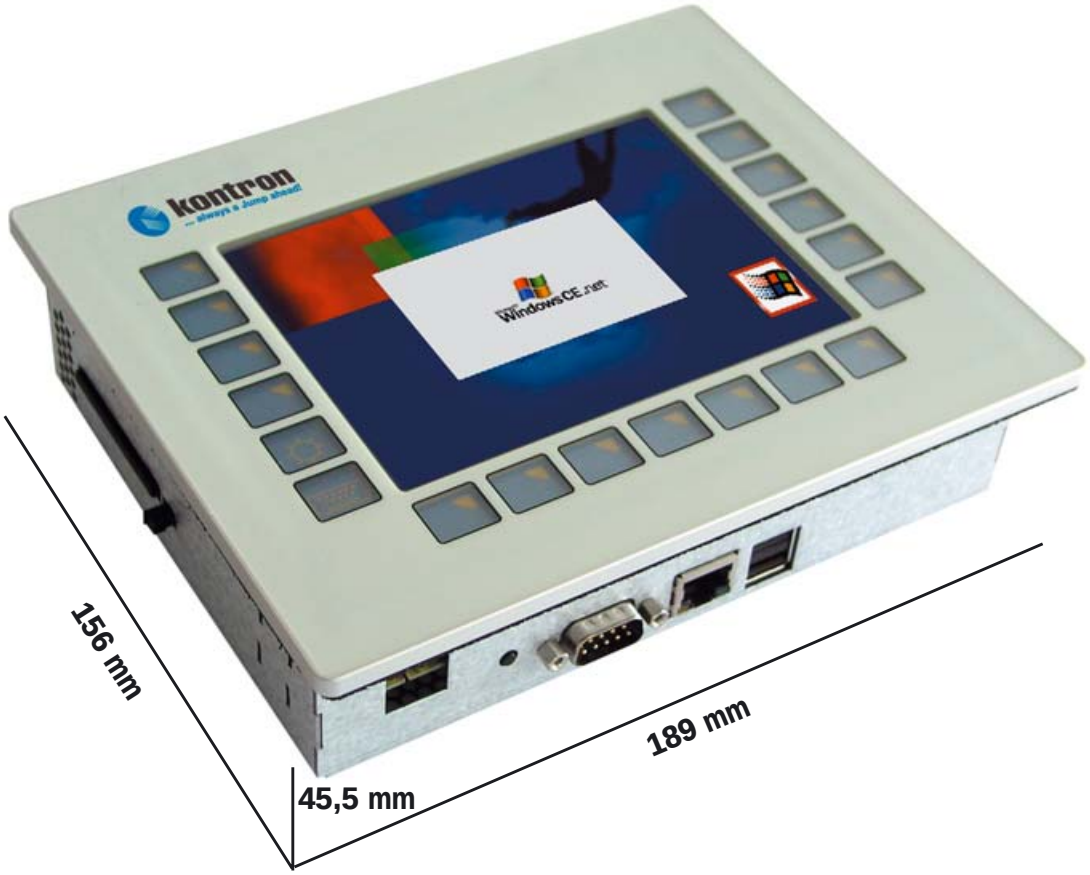

Thin Client
Performance upgrades and software installation

Serviceability
Improved by avoiding drives and fans

Open
Windows CE.net Platform, Embedded Linux Platform

Product Overview

Kontrons Thin Client acchieves a superior price/performance ratio through a combination of reduced hardware costs, reduced maintenance and support costs, reduced down time, improved performance and enhanced security. High availabilty and the lack of local harddisk related problems, makes the user spend more time on his actual tasks.

Performance upgrades due to increasing software demands are done on the servers. Cost and time consumption for upgrading one or few servers are only fractions compared to upgrade all workstations.

Technical Information

Processor	
	Geode SC1200, optional X-scale
Memory	
	Up to 128 MByte RAM, up to 128 MByte onboard Flash, Compact Flash up to 512 MByte
Display	
	5.7“ QVGA TFT, 350 cd/m²; optional 5.7“ QVGA STN, 180 cd/m²
Touch Screen	
	Resistive analog
I/Os	
	1x RS232, LAN 10/100 BaseT, 2x USB 1.1
Drive Bays	
	Compact Flash
Power Supply	
	24 V DC (18-36 V), optional AC 100-1125/200-240 VAC
EMC	
US:	FCC47 CFR Part15, Class A level
Europe:	EN 50081 -1/-2 (emission) EN 50082 -1/-2 (immunity) EN 55022/A; 1994 (CISPR22)

Approvals	
	CE, FCC Class A
Protection Class	
	IP 65 (Frontside)
Dimensions	
	Panelmount: 156 x 189 x 45.5 mm (H x W x D)
Altitude	
	operating: 10,000 ft (3,048m), storage: 15,000 ft (4,622m)
Shock	IEC 60068-2-27
operating:	5G 11ms duration (half-sine)
storage:	15G 11ms duration (half-sine) 6-axis
Vibration	IEC 60068-2-6
operating:	10-58 Hz; ±0,0375 mm, 58-500 Hz; 0,5G sine/6 axis
storage:	10-58 Hz; ±0,075 mm, 58-500 Hz; 1G sine/6 axis
Temperature/Humidity (*)	
operating:	5° to 50°C / 5 to 95% @ 40°C not condensing (32° to 122°F / 5 to 95% @ 104°F not condensing)
storage:	-10° to 60°C / 0 to 95% @ 40°C not condensing (14° to 140°F / 0 to 95% @ 104°F not condensing)

(*) see manual for details

Microsoft Windows CE.net



Corporate Offices

Europe, Middle East & Africa
Oskar-von-Miller-Straße 1
85386 Eching/Munich - Germany

Tel.: +49 (0)8165/ 77 0
Fax: +49 (0)8165/ 77 219

sales@kontron.com

US/ Canada
6260 Sequence Drive
San Diego, CA 92121-4371

Tel.: +1 858 677 0877
Fax: +1 858 677 0898

sales@us.kontron.com

Asia Pacific
5F-1, 341, Sec 4, Chung Hsiao E.
Rd, Taipei, Taiwan

Tel: +886 2 2781 5791
Fax: +886 2 2741 7379

sales@kontron.com.tw

kontron ... always a Jump ahead!

#Micro Client - MM04014e_WH
All data is for information purposes only and not guaranteed for legal purposes. Subject to change without notice. Information in this datasheet has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccurancies. All brand or product names are trademarks or registered trademarks of their respective owners.