
MODPACK
ANALOG &
DIGITAL
I/O

PB-DIN3

20-Channel Optoisolated Digital Input MODPACK

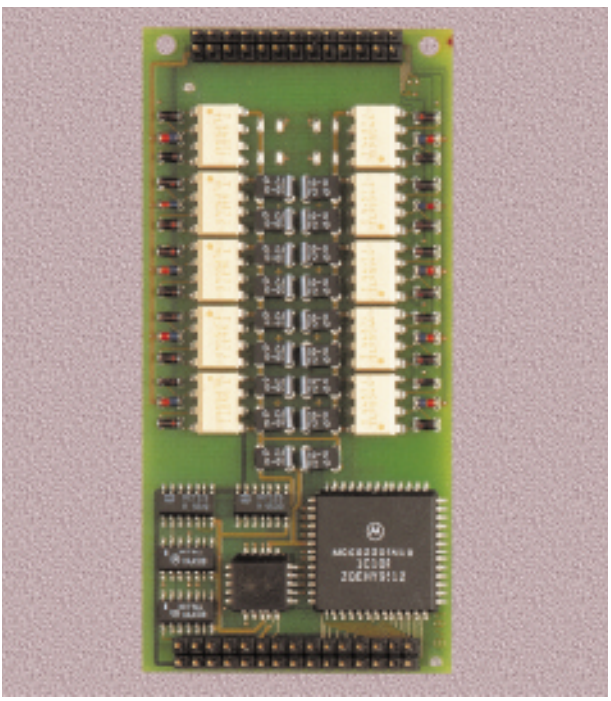

Characteristics


Function:	16 optoisolated digital input channels and 4 change-of-state inputs arranged in two groups (2x10) with common GND
Input Voltage:	24V DC
Max. Input Rating:	10.5V DC < V_{in} < 34V DC
Input Current:	5mA @ 24V DC typ.
Switching Level:	<10V = low, >16V = high
Input Frequency:	200Hz (max.)

Timer

Resolution:	24-bit
Frequency:	8 MHz (derived from 16 MHz SYSCLK) on the carrier board

Common

Isolation:	2500V DC between I/O and system; 100V DC between inputs
Power Req.:	+5V DC (± 5%), 100mA typ.
Temp. Ranges:	0ºC to +70ºC -40ºC to +85ºC (opt. E2) -55ºC to +85ºC (storage)
Humidity:	0% to 95% non-condensing

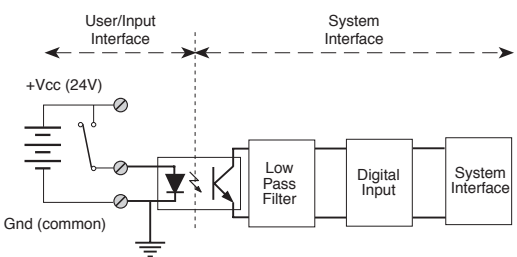

An optoisolated 20 channel digital input module for 24V DC sensor operation utilizing the 68230 "PIT" from Motorola. Each of the 20 inputs which are divided into two groups each possessing a common ground, are filtered against noise inherent in industrial situations and possess 2500V isolation between the input and ground and 100V between individual inputs.

Four of the inputs may be used normally or for change of state inputs with interrupt generation.

Product	Description	Order No.
PB-DIN3	ModPack with twenty 24V DC optoisolated and filtered digital inputs	3102

© PEP 1998: ™ All trademarks are recognised. Subject to change without notice
Publication Number AB 14306 DS-0298

U.S.A.: Tel.: ++1 412 921 3322
U.K.: Tel.: ++44 (0) 1273 44 11 88
France: Tel.: ++33 (0) 1 39 16 10 30
Belgium: Tel.: ++32 (0) 2 461 04 08

Holland: Tel.: ++31 (0) 76 5217 957
Sweden: Tel.: ++46 (0) 8 756 72 60
Poland: Tel.: ++48 (0) 2 28 23 55 73
S. Korea: Tel.: ++82 (0) 25 58 08 38

PEP Modular Computers GmbH
Apfeltrangerstr. 16
D-87600 Kaufbeuren
Tel.: ++49 (0) 8341 803 - 0
Fax: ++49 (0) 8341 803 - 499
Internet: http://www.pep.com
E-mail: info@pep-kaufbeuren.de

Modular Computers ®