Errata 1

Manual: 24107

Manual Index: 01

Table of Contents:

1. *Reference: Page 1-5, Chapter 1.3.1, Text ……1-3*
2. *Reference: Page 4-4, Chapter 4.2.3, Figure 4-3 ……1-3*
3. *Reference: Page 4-5, Chapter 4.2.3, Figure 4-4 ……1-4*

.

© 2005 Kontron Modular Computers GmbH

This page has been intentionally left blank.

 © 2005 Kontron Modular Computers GmbH

1. Reference: Page 1 - 5, Chapter 1.3.1, Text

The referenced information (text) is revised as follows.

The text:

The board accepts only single-ended voltages up to a maximum of +30V.

is changed to read:

The board accepts only voltages up to a maximum of +30V.

The text:

- Signal is single-ended

is changed to read:

- Differential input signal, isolated from other channels

2. Reference: Page 4 - 4, Chapter 4.2.3, Figure 4-3

The referenced information (figure title) is revised as follows.

The text:

Figure 4-3: Configuration Diagram for All Channels

is changed to read:

Figure 4-3: Configuration Diagram for All Channels, Common ‘Minus’

© 2005 Kontron Modular Computers GmbH

3. Reference: Page 4 - 5, Chapter 4.2.3, Figure 4-4

The referenced information (figure title) is revised as follows.

The text:


Figure 4-4: Configuration Diagram for All Channels

is changed to read:

Figure 4-4: Configuration Diagram for All Channels, Common ‘Plus’

The referenced information (figure) is superseded by the following replacement figure (the polarization of the voltage source is changed):

Figure 4-4: Configuration Diagram for All Channels, Common ‘Plus’

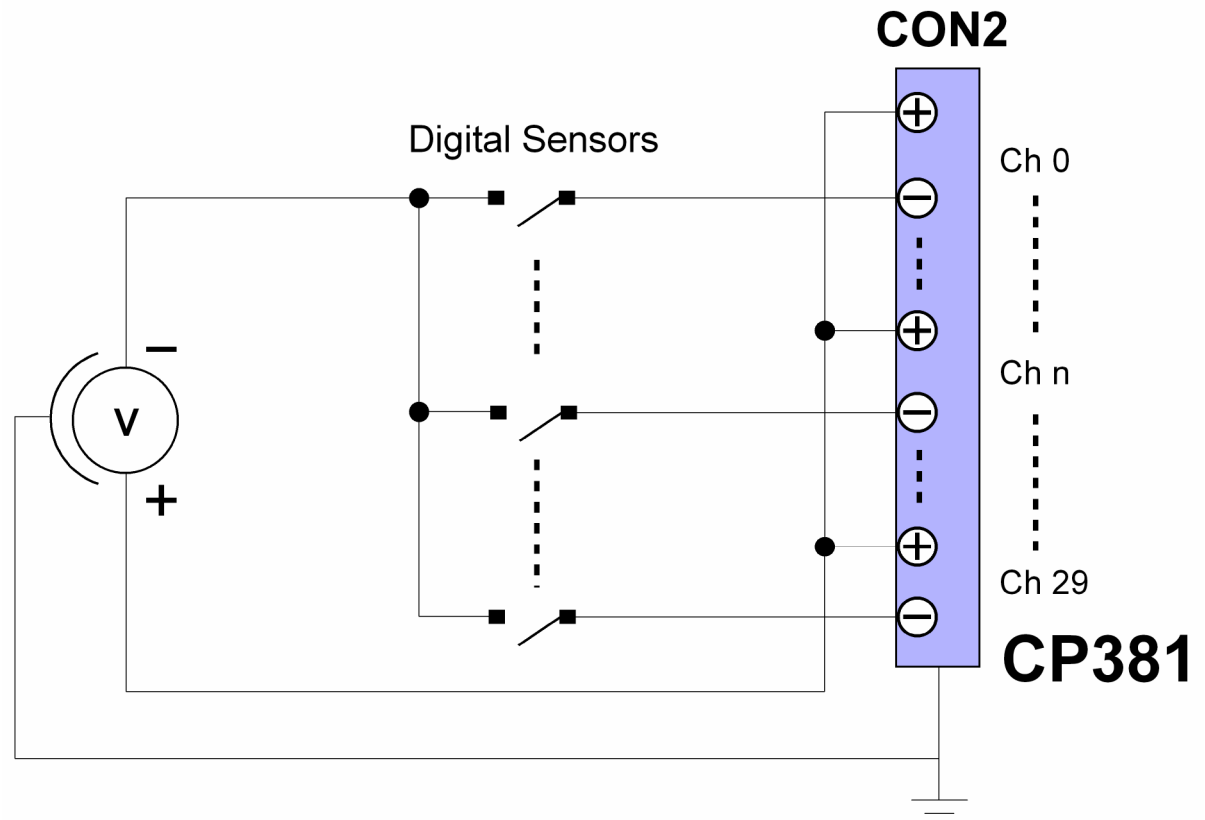

© 2005 Kontron Modular Computers GmbH